

| Specifications | Content |
|--------------------------------|---|
| Printer type | FFF technology molding method (Laminated solution type) |
| No. of nozzles | Single nozzle |
| Nozzle diameter | 0.4 mm |
| Maximum build size (W x D x H) | 210 x 200 x 195 mm |
| Layer pitch | 0.05 to 0.40 mm |
| Filament | Mimaki genuine PLA filament only |
| Filament diameter | 1.75 mm |
| Build speed | 10 to 200 mm/s |
| Filament supply | Filament supplied automatically to automatic cartridge nozzle |
| Bed leveling | Semi-Auto leveling system |
| GUI | 5-Inch full-touch screen |
| LED lamp | Integrated |
| Monitoring camera | From PCs, smartphones and tablets via Wi-Fi connection |
| Interface | USB2.0, Ethernet, Wi-Fi, USB memory |
| Slicing software | Dedicated slicing software (3DWOX Desktop Software) |
| Supported extensions | Stl, Ply, Obj, G-code (RepRap), Amf |
| Unit size (W x D x H) | 421 x 433 x 439 mm |
| Weight | 16 kg |

3DFF-222

FFF technology 3D desktop printer



⚠ Precautions for 3D objects

- Please make sure to execute an advanced evaluation regarding the physical property (strength, weather resistance, safety etc.) for estimated applications.
- Depending on application, a post-processing might be necessary such as top coating or wiping by ethanol after removal of support material.

●Some of samples in this catalogue are artificial renderings. ●Specifications, design and dimensions stated in this catalogue may be subject to change without notice for technical improvements etc. ●The corporate names and merchandise names written in this catalogue are the trademark or registered trademark of the respective corporations. ●The specifications described in this catalogue are as of April 2019.

Mimaki MIMAKI ENGINEERING CO., LTD.
mimaki.com 2182-3 Shigeno-Otsu, Tomi-city, Nagano 389-0512, Japan
TEL: +81-268-64-2281

Mimaki Global Network

| | | | |
|-----------|--|-----------|----------------------------------|
| USA | MIMAKI USA, INC. | Europe | MIMAKI EUROPE B.V. |
| Brazil | MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA | Indonesia | PT. MIMAKI INDONESIA |
| India | MIMAKI INDIA PRIVATE LIMITED | Australia | MIMAKI AUSTRALIA PTY. LTD. |
| Taiwan | MIMAKI ENGINEERING (TAIWAN) CO.,LTD. | China | SHANGHAI MIMAKI TRADING CO.,LTD. |
| Singapore | MIMAKI SINGAPORE PTE. LTD. | Thailand | MIMAKI (THAILAND) CO.,LTD. |

3DFF-222

FFF technology 3D desktop printer



Remote monitoring

A camera and LED light are provided for remotely monitoring the building progress. By just installing a mobile app to your smartphone or tablet computer, you can check the building progress from anywhere you desire.



Adoption of flexible metal bed

The flexible bed of the 3DFF-222 allows for the removal of formed objects by slightly bending the formation table (bed). Unlike 3D printers requiring the use of scrapers for the removal of objects, the fabrication process can be implemented without safety concerns. Additionally, the formation table (bed) is equipped with thermostatic functions enabling the stable formation of objects.




Adoption of HEPA filter

HEPA (High Efficiency Particulate Air) filter is a high-performance filter used in fields requiring air cleaning. The 3DFF-222 incorporates the HEPA filter to prevent contaminated air generated during 3D printing from being discharged into the work site.



Automatic filament supply

Filament installation is accomplished by inserting filament reels into a dedicated cartridge and sliding it to the main unit. By this alone, the filament is supplied to the nozzle automatically. Complex threading of the filament through small nozzle openings is no longer necessary. Automatic filament cutting capability also reduces bothersome tasks significantly after using the printer.

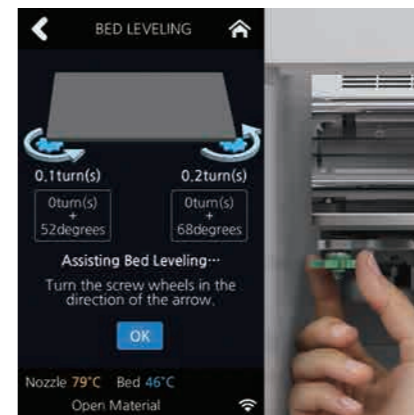

Bed leveling assist

Maintaining the horizontal of the formation table (bed) is the key aspect for 3D printers to produce perfectly formed objects. 3DFF-222 measures horizontal errors of the table automatically, providing accurate processing instructions on the color monitor. This allows for the constant horizontal leveling of the table and enables stable formation.



Silent 3D printer

The adoption of high performance motor drivers reduces the 3D printing noise level to 45dB (almost to the level of a museum environment). The sound of printer operation no longer distracts people doing other tasks in the vicinity.

UJF-6042 MkII UJF-3042 MkII UJF-7151 plus

Perfect for jig production

