

NEW!

It is downloadable from our website for your convenience!

FineCut 9

for Illustrator®

FineCut 9

for CoreDRAW®

Plug-in software for Illustrator and CoreDRAW

Standard feature

The combination of FineCut9 and a register-mark sensor allows calibrated inclination of coordinates or distance to assure accurate cutting. The [Mark separation] function can also handle long media by cutting it multiple times.

◀Main features▶

- Direct and simple cutting from Illustrator and CoreDRAW
- [Multiple Cutting] function cuts the same place with different conditions such as pressure.
- [Line Separation] function prevents over-cutting of media.
- ID Cut auto-starts cutting after reading cut data during Print&Cut operation.

Four register marks making by [Creating Register Marks] function

Print

Loading the register marks by CF22 for Print & Cut

Cut

Finish

Specifications

Item		CF22-1225
Effective plotting area		2,500x1,220mm (98.4x48.0 in)
Max. Media size to be set		2,600x1,360mm (102.4x53.5 in)
Motorization		X/Y/Z/θ axis : DC servo motor
Maximum plotting speed		55cm / sec
Cutter head type		For Industrial : T/TF/RT head For Package : TD/RC head
Cutting pressure		Eccentric cutter : 20 to 400g    Low pressure tangential : 300 to 1,500g High pressure tangential : 1,000 to 5,000g Creasing roller : 1,000 to 5,000g
Static accuracy	Repetition accuracy	±0.1mm
	Distance accuracy	±0.1mm or ±0.1% of movement distance, whichever is greater
	Origin reproducibility	±0.1mm or less
	Perpendicularity	±0.7 / 2500mm
Work fixation		Vacuum suction by blower
Receiving buffer capacity		27MB (17MB while sorting)
Command Interface		MGL-IIc3 USB 2.0 (Full Speed), RS-232C, Ethernet
Safety standard		VCCI-class A, FCC-class A, UL60950-1, CB Report (EN60950) CE Marking (Machinery), RoHS, REACH
Operational environment	Temperature	5 to 40 degC
	Humidity	35 to 75%RH (Non condensing)
	Accuracy guaranteed temperature	20 to 25 degC
	Temperature gradient	±10 degC / h or less
Power		Single phase AC100V to 240V
Power consumption		300W
Outer dimension (WxDxH)		RC / RT head : 3,160x1,930x1,200mm (124.4x76.0x47.2in) T / TD / TF head : 3,160x1,930x1,150mm (124.4x76.0x45.3in)
Weight		230kg (507.1lb)    (RC-S head)

\* Specifications, designs and dimensions stated in this list may be subject to change without notice due to technical improvement etc.

Available materials

Material	Head type	T	TF	RT	TD	RC
Corrugated board (E to B flute) *					●	●
Corrugated board (A/B flute) *						●
Coated board for packaging *					●	●
Vinyl chloride for clear package *					●	●
Corrugated plastic					●	●
Vinyl chloride sheet for signboard	●	●	●	●	●	●
Reflecting sheet	●	●	●	●	●	●
Joint sheet (0.4 to 3.0 mm)		●				
Sand-blasting rubber	●	●	●	●	●	●
Industrial sheet rubber (3mm or less)	●	●	●	●	●	△
Pattern Happort (PVC mount for pattern)	●	●	●	●	●	●
Teflon (1.0 to 5.0mm)		●				
Resin belt (5.0 mm or less)	●	●				
Foamed material (20mm or less )				●		
Foamed material (10mm or less )						●

The above table is for the references, as materials are different depending on manufacturers.  
Please make sure to have a preliminary test.  
The material marked with (\*) is available with creasing roller, too.

Option & Supply List

■ : Standard Supply    ○ : Optional item

Item	Item No.	T	TF	RT	TD	RC	Remark
Swivel cutter holder	SPA-0001	■	■	■	■	■	3 pcs./set
	Swivel blade for vinyl sheet	SPB-0001	■	■	■	■	3 pcs./set
	Swivel blade for small letters	SPB-0003	○	○	○	○	3 pcs./set
	Swivel blade for rubber sheet	SPB-0005	○	○	○	○	3 pcs./set
	Swivel blade for reflective sheet	SPB-0006	○	○	○	○	2 pcs./set
	Swivel blade for fluorescent sheet	SPB-0007	○	○	○	○	3 pcs./set
	Swivel blade for 45°DLC	SPB-0081	○	○	○	○	3 pcs./set
Cutter holder 4N	SPA-0053	■	■	■	■	○	
	High-speed steel blade 30°	SPB-0043	■	■	■	■	40 pcs. x 5 c/s
	High-speed steel blade 45°	SPB-0044	○	○	○	○	3 pcs./set
	Carbide blade 30°	SPB-0045	■	■	■	■	3 pcs./set
	Carbide blade 30°DLC	SPB-0080	○	○	○	○	3 pcs./set
	Carbide blade 45°	SPB-0046	○	○	○	○	3 pcs./set
	Carbide blade 45°DLC	SPB-0081	○	○	○	○	3 pcs./set
Cutter holder 2N	SPA-0113	○	○	○	○	■	
	High-speed steel blade 30°	SPB-0043		○	○	■	40 pcs. x 5 c/s
	Carbide blade 30°	SPB-0045		○	○	■	3 pcs./set
	Carbide blade 30°DLC	SPB-0080		○	○	○	3 pcs./set
Cutter holder 7N	SPA-0054	○	■	○	○	○	
	High-speed steel blade 30° 7mm	SPB-0048	○	○	○	○	15 pcs. x 5 c/s
Cutter holder RN	SPA-0055	○	○	○	○	○	
	Titanium coated double-edged blade	SPB-0009	○	○	○	○	1 pc.
Cutter holder JN	SPA-0061	○	○	■	○	○	
	Carbide double-edged blade	SPB-0031	○	■	○	○	2 pcs./set
Cutter holder 10N	SPA-0077	○	○	■	○	○	
	Carbide design blade 30°	SPB-0051	○	○	○	○	3 pcs./set
	Joint sheet carbide blade	SPB-0063	○	○	○	○	3 pcs./pack
Cutter holder 06(S)	SPA-0251			■			
	Carbide blade 2°	SPB-0064		■			5 pcs./set
Cutter holder 07	SPA-0114				■		
	20mm blade	SPB-0055			■		10 pcs./set
	Carbide blade 17°	SPB-0065			■		5 pcs./set
	Carbide blade 17°DLC	SPB-0083			○		5 pcs./set
Cutter holder 08x15	SPA-0170			○	○		
	Carbide blade 7x15	SPB-0075		○	○	○	For rubber up to 15mm thickness
Cutter holder 09x5	SPA-0179			○	○		
	Carbide blade 25x5	SPB-0077		○	○		5 pcs./set
	Carbide blade 25x5 DLC	SPB-0078		○	○		5 pcs./set
	Carbide blade 25x5 F DLC	SPB-0079		○	○		5 pcs./set
Creasing roller	SPA-0056				■	○	For E corrugated board
	Creasing roller CN	SPA-0057			■	■	For coated board
	Creasing roller PN	SPA-0058			○	○	For pleat work
	Creasing roller EN	SPA-0067			○	○	For E/B corrugated board
	Creasing roller YN	SPA-0124			○	■	For general corrugated board
	SPA-0183	■	■	■	■	■	
Pen holder	SPA-0183	■	■	■	■	■	
	Ball point pen spare	SPC-0726	■	■	■	■	10 pcs./set
	Pen holder	SPA-0068	○	○	○	○	For N-5200
	Mark chip	SPC-0469	○	○	○	○	40 pcs./set
	Felt mat for CF22-1225 Reciprocating cutter	SPC-0835			○	○	Exclusively for CF22-1225
	Vacuum unit	OPT-C0199	○	○	○	○	120V, 0.51/0.7kw, filter separately available
	Vacuum unit	OPT-C0200	○	○	○	○	220V, 0.51/0.7kw, filter separately available
	Vacuum unit	OPT-C0201	○	○	○	○	240V, 0.51/0.7kw, filter separately available
	Vacuum unit	OPT-C0205	○	○	○	○	120V, 0.38kw, filter separately available
	Vacuum unit	OPT-C0206	○	○	○	○	220V, 0.25/0.38kw, filter separately available
	Vacuum unit	OPT-C0207	○	○	○	○	240V, 0.25/0.38kw, filter separately available
	Blade tip adjuster (For swivel cutter)	OPT-C0066	○	○	○	○	Dial type
	Blade tip adjuster II (For tangential cutter)	OPT-C0237	○	○	○	○	Dial type

Since electrical work may be necessary, please consult in advance.

●Some of samples in this catalog are artificial renderings. ●Specifications, design and dimensions stated in this catalog may be subject to change without notice for technical improvements etc. ●The corporate names and merchandise names written in this catalog are the trademark or registered trademark of the respective corporations. ●Please note that descriptions and data in this catalog are as of January 2020.

Mimaki

mimaki.com

MIMAKI ENGINEERING CO., LTD.

2182-3 Shigeno-otsu, Tomi-city, Nagano 389-0512, Japan

Tel. +81-268-64-2281

Mimaki Global Network

USA	MIMAKI USA, INC.	Europe	MIMAKI EUROPE B.V.
Brazil	MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA	Indonesia	PT. MIMAKI INDONESIA
India	MIMAKI INDIA PRIVATE LIMITED	Australia	MIMAKI AUSTRALIA PTY. LTD.
Taiwan	MIMAKI ENGINEERING (TAIWAN) CO.,LTD.	China	SHANGHAI MIMAKI TRADING CO.,LTD.
Singapore	MIMAKI SINGAPORE PTE. LTD.	Thailand	MIMAKI (THAILAND) CO.,LTD.

DB40272-04

For INDUSTRIAL PRODUCTS

Flatbed Cutting Plotter

CF22-1225

Print&Cut, the optimal cooperated performance



# More simple, more accurate Cutting plotter with enhanced Print & Cut cooperation

More simple, more accurate  
CF22-1225 is a cutting plotter based on cooperation with printer focusing  
to enhancement of usability.

## CUT CF22-1225

CF22-1225 is omnipotent to be capable of cutting  
coated cardboard / corrugated cardboard, marking  
their gauge for folding, and also reciprocating cutting  
foam materials used as cushions for those cartons.  
Selectable cutter head types are prepared for various  
industrial materials cutting.  
Cut in the range of 2500 mm x 1220 mm is possible.



Vacuum unit / Adsorption area control  
Vacuum ON / OFF can be easily done  
with the operation panel.  
Control of adsorption area in 4 divisions  
is possible by opening and closing the 4  
suction valves.

## PRINT & CUT



## JFX200-2513

PRINT

It is a flatbed inkjet printer applied UV curing ink. Printable  
area is 2,500 x 1,300mm to be available to print directly on  
4x8 (1,220 x 2,440mm/4x8ft) sized media, too. The available  
media thickness is up to 50mm.

## Suggestion of total in-store decoration

By combining Mimaki printer with CF22-1225 and a CAD software [ ArtiosCAD DS ], the total creation of packages, furniture and cushioning materials is possible.  
On-demand production can reduce cost and lead time of work.



- 1 Package  
(UV printer x CF22 x CAD)
- 2 Cushioning material  
(UV printer x CF22)
- 3 Furniture  
(UV printer x CF22 x CAD)
- 4 Poster  
(UV printer x CF22)
- 5 Cut-out panel  
(UV printer x CF22)
- 6 POP  
(UV printer x CF22)
- 7 Life-sized panel  
(UV printer x CF22)
- 8 Hanging signboard  
(UV printer x CF22)

New size !  
4x8 ft board cutting  
is now available !

## PRINT & CUT


With the new function ID-cut, smoothly 'Print & Cut' operation !

POINT


What is ID-cut ?

There is no need to select the cut data when cutting of printed materials.  
In case of cutting variable printing, it is started automatically after loading the registration mark.

### System configuration

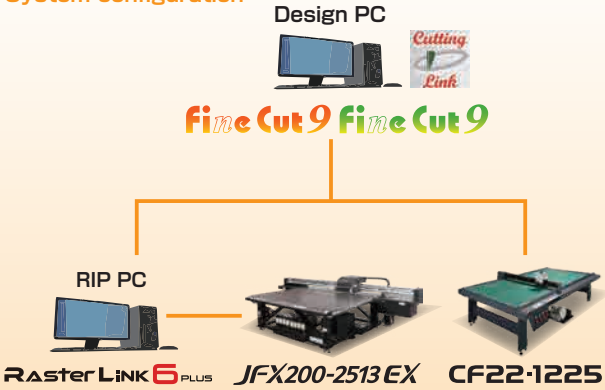


### Workflow

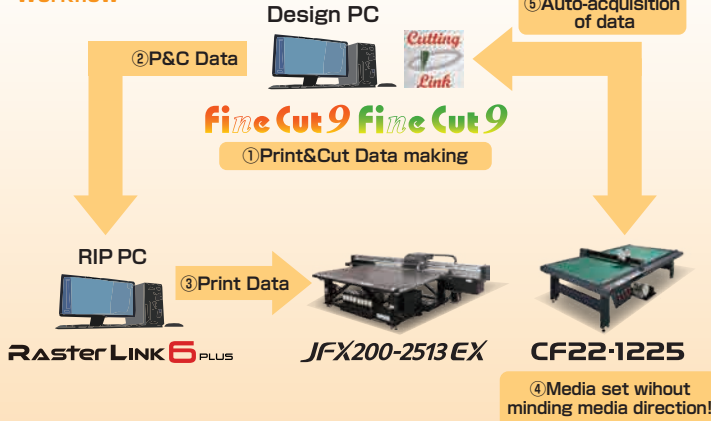

## Easy making of package and POP furniture


Ideal for short-run  
production of fancy box,  
POP furniture, etc.

- Possible to perform an on demand production quickly responding to an  
order even as small as 1 piece.
- You can perform from sample making to short-run production, as you like.
- Mark sensor function enables you to make precise contour cutting of  
printed materials.
- Creasing tool produces optical creases in carton and corrugated board.




### Cutter head for package and POP furniture

Head types	Tool station	Tool types	Pressure	Remarks
TD	A	Pen/Eccentric cutter	20~400g	
	B	Tangential cutter	300~1,500g	
	C	Creasing roller	1,000~5,000g	
RC	A	Pen/Eccentric cutter	20~400g	
	B	Reciprocating cutter	Fixed at 1,500g	Amplitude 2 mm Maximum vibration frequency 7000 times
		Tangential cutter	500~1,500g	
	C	High pressure tangential cutter Creasing roller	1,000~5,000g	

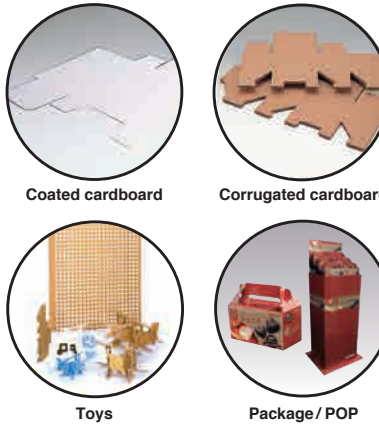

## Cutting of industrial materials is as well applicable.

Three types of cutter head are ready to widely apply to cut industrial materials of acrylic, rubbers etc.  
The most suitable one for your application can be chosen.



### Cutter head for industrial materials cutting

Head types	Tool station	Tool types	Pressure	Remarks
T	A	Pen/Eccentric cutter	20~400g	
	B	Tangential cutter	300~1,500g	
TF	A	Pen/Eccentric cutter	20~400g	
	B	Tangential cutter	300~1,500g	
	C	High pressure tangential cutter	1,000~5,000g	
RT	A	Pen/Eccentric cutter	20~400g	
	B	Reciprocating cutter	Fixed at 1,500g	Amplitude 5 mm Maximum vibration frequency 5000 times
		Tangential cutter	500~1,500g	
	C	Tangential cutter	300~1,500g	

