

Print 360° while the cylindrical object rotates.

UJF-3042 MkII e / UJF-3042 MkII EX e

UJF-6042 MkII e / UJF-7151 plusII **OPTION**


MimakiTM

Kebab HS



(Kebab HS pictured with UJF-3042MkII e)

Up to **3x** faster production!
360° Print option
for flat and tapered cylinders.

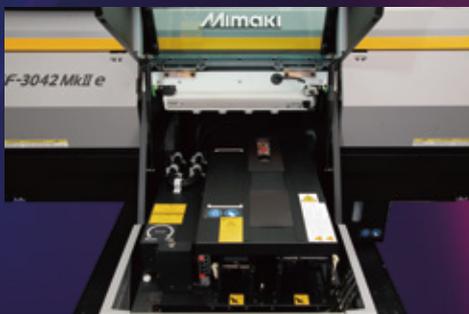

Compatible printers

UJF-3042 MkII e
UJF-3042 MkII EX e



UJF-6042 MkII e



UJF-7151 plusII



Up to 3x* faster productivity!

UJF-6042MkII e + Kebab MkII L

28 min 02 sec

UJF-6042MkII e + Kebab HS

9 min 17 sec

← Significant time savings




*UJF-6042MkII e, 600x1200 dpi 16 Pass, W+CMYK, 100 mm (3.9 in) diameter, 200 mm (7.9 in) length. Speed varies depending on printer and output settings.

Compatible with cylinders up to 100 mm (3.9 in) diameter, 300 mm (11.8 in) length*, and 7.5° taper

Kebab HS can print on objects with 50 to 100 mm (2.0 to 3.9 in) diameter & 30 to 300 mm (1.2 to 11.8 in) long*.

It also supports tapered objects with gradient angles from 0 to 7.5°, expanding the range of your products.

*Up to 280 mm (11.0 in) with adaptor.

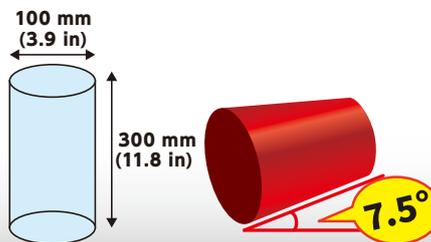

Adaptor and material setup



Dedicated adaptors (standard attachment)

Taper warp correction added to RasterLinkTools!

RasterLinkTools is an Adobe Illustrator plug-in designed to help you prepare your print files for RasterLink. When printing on tapered materials, the print area compresses as you print from the large to smaller diameter, which can also compress your print. RasterLinkTools' Kebab tapered shape function allows you to easily correct for the image warp to keep your designs and logos in their original shape.



RasterLink7 makes print job management simple

KEBAB dedicated function ① Print image measurement

By entering the measured outside diameter of the workpiece, the circumference and recommended print width is automatically calculated.

KEBAB dedicated function ② Image scaling function

Print image is automatically scaled according to the calculated outer circumference. No calculation and scaling is required.

Item	Kebab HS
Item code	OPT-J0528
Compatible printer model	UJF-3042MkII e, UJF-3042MkII EX e, UJF-6042MkII e, UJF-7151 plusII
Rotary degree of printing material	±360 degrees or more (no limitation)
Rotation system	Shaft rotation (the shaft fixes the material)
Applicable objects	Cylindrical objects / Tapered media (maximum gradient angle 7.5°)*1
Printable size	Length: 30-280 mm (1.2-11.0 in)*2 Diameter: 50-100 mm (2.0-3.9 in)
Printable area	Feeding direction (X)
	Print head moving direction (Y)
Maximum weight of print material	3 kg (6.6 lb) or less
Interface	Exclusive connector
RIP	RasterLink7
Weight	Approx. 13 kg (28.7 lb)
External dimensions (W x D x H)	376 mm x 541 mm x 150 mm (14.8 in x 21.3 in x 5.9 in) or less

*1 Maximum gradient angle is limited when the large diameter of the material is 86 mm or more.
*2 In case of using adaptors (standard attachment).

●Some of the samples in this catalog are artificial renderings. ●Specifications, design and dimensions stated in this catalog may be subject to change without notice (for technical improvements, etc). ●The corporate names and merchandise names written on this catalog are the trademark or registered trademark of the respective corporations. ●Inkjet printers print using extremely fine dots, so colors may very slightly vary after replacement of the printing heads. Also note that if using multiple printer units, colors could vary slightly from one unit to other unit due to slight individual differences. ●The specifications described in this catalog are as of April 2024.

Mimaki™ MIMAKI ENGINEERING CO., LTD.
mimaki.com
2182-3 Shigeno-Otsu, Tomi-city, Nagano 389-0512, Japan
TEL: +81-268-64-2281

Mimaki Global Network

USA	MIMAKI USA, INC.	Europe	MIMAKI EUROPE B.V.
Brazil	MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA	Indonesia	PT. MIMAKI INDONESIA
India	MIMAKI INDIA PRIVATE LIMITED	Australia	MIMAKI AUSTRALIA PTY. LTD.
Taiwan	MIMAKI ENGINEERING (TAIWAN) CO.,LTD.	China	SHANGHAI MIMAKI TRADING CO.,LTD.
Singapore	MIMAKI SINGAPORE PTE. LTD.	Thailand	MIMAKI (THAILAND) CO.,LTD.
Vietnam	MIMAKI VIETNAM CO., LTD.		