

The operating conditions of the printer and the amounts of inks used can be checked remotely. PICT allows you to do other work during printing, helping you to perform operations in a planned manner.

You can also schedule maintenance and preparation for ink refilling in advance.



- ✓ Production control
- ✓ Preparation for ink refilling
- ✓ Scheduling of maintenance etc...

■ Specifications

Item		TS330-3200DS
Print head		On-demand piezo head
Print resolution		300, 600, 1200dpi
Print gap		Manual adjustment by 3 levels (3.0/3.5/4.0 mm)
Ink set	Type	Sublimation transfer ink Sb411, Sb420
	Color	M, BL, Y, K
	Capacity	2,000 ml/10 kg (when the optional unit is used)
Maximum printable width		3,240 mm (127.5 in)
Media	Media type	Sublimation transfer paper, textile
	Max. width	3,250 mm (128.0 in)
	Max.thickness	1.0 mm (0.04 in)
	Roll diameter	250 mm (9.8 in)
	Roll weight	100 kg (220.7 lb)
	Coer dia.	3 inches
Distance accuracy	Absolute accuracy	±1.5 mm or specified distance ±0.3%, whichever is larger
	Reproducibility	±1.5 mm or specified distance ±0.3%, whichever is larger
Certifications		VCCI-classA, FCC-classA, IEC62368-1 compliant ETL, CE marking (EMC Directive, Low Voltage Directive, Machinery Directive, RoHS Directive), CB certification, REACH, RCM mark, KC certification, UKCA mark
Interface		Ethernet 1000BASE-T (recommended), USB 2.0 Hi-Speed
Power		Single-phase 200 to 240 V ±10%, 10A, 50/60Hz ±1%
Power consumption		Up to 2,400 W (max.), 800 W (when continuously operated), 4.5 W (sleep mode)
Operation environment	Temperature	20-30 degC (68-86 degF)
	Humidity	35 to 65 % RH (No condensation)
	Guaranteed accuracy temperature	20 - 25 degC (68-77 degF)
	Dust level	0.15 mg/m ³ (Equivalent to a general office floor level)
Dimensions (W x D x H)		5,410 mm x 1,075 mm x 1,440 mm (213.0x42.3x56.7 in)
Weight		925 kg (2039.3 lb)
Installation space (W x D)		6,500 mm x 3,100 mm (255.9x122.0 in) and more

Brightly colored and highly safe
Sb420 Ink for both direct sublimation and sublimation transfer printing

Mimaki's highly colored, wide color gamut ink realizes brightly colored and expressive print finishes.

Sb411, ink for sublimation transfer printing, can also be used.

*For more details, please contact one of our sales offices or sales agencies.

■ Supplies

Item	Code	Remark
Sublimation transfer ink Sb420	Magenta SB420-MD-2L	2L pack
	Blue SB420-BLD-2L	
	Yellow SB420-YD-2L	
	Black SB420-KD-2L	10kg ink tank
	Magenta SB420-MD-BJ	
	Blue SB420-BLD-BJ	
Sublimation transfer ink Sb411	Yellow SB420-YD-BJ	10kg ink tank
	Black SB420-KD-BJ	
	Magenta SB411-MT-2L	
	Blue SB411-BLT-2L	
	Yellow SB411-YT-2L	
	Black SB411-KT-2L	10kg ink tank
Magenta SB411-MT-BJ		
Blue SB411-BLT-BJ		
Yellow SB411-YT-BJ	10kg ink tank	
Black SB411-KT-BJ		
Maintenance liquid03	ML003-Z-K1	For routine Maintenance
Flushing liquid03	FL003-Z-22	Flushing liquid for head cleaning
Flushing liquid 03 2 L	FL003-Z-2L	Flushing liquid for ink replacement

■ Options

Item	Code
10 kg ink tank supply unit	A107131/OPT-J0529


■ Software

Raster Link 7

Supporting the beauty of prints and operability

- Increases the reproducibility of the special effects, such as the transparency effect, of PDF data
- Increases the RIP speed for PDF data by an average of 25%
- Employs a mail mergeprint function that can customize prints
- Supports favorite settings, pup-up logs, and various other functions

Direct Sublimation and Transfer Sublimation in One Unit
The Way To Extend Your Soft Signage Business

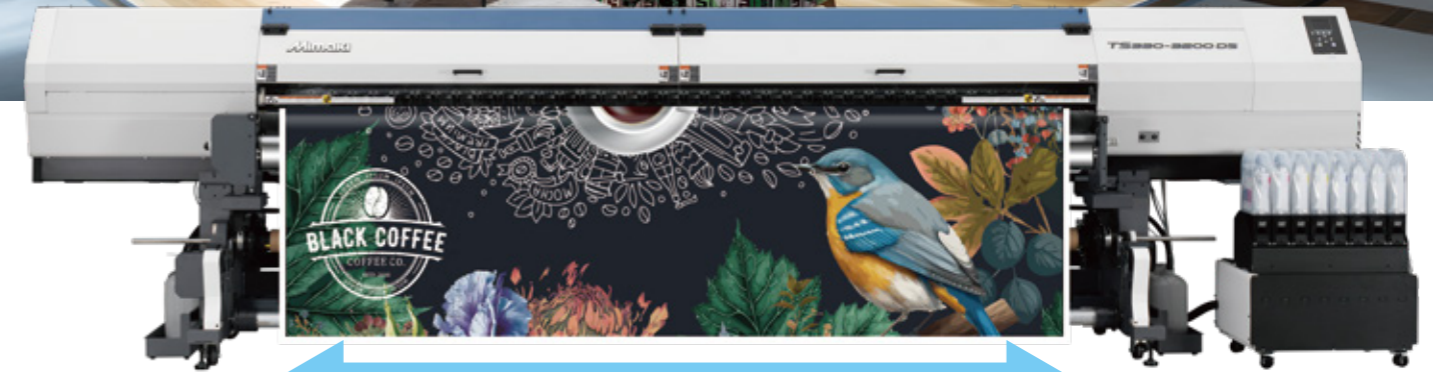

Max 3.2M

●Some of the samples in this catalog are artificial renderings. ●Specifications, design and dimensions stated in this catalog may be subject to change without notice (for technical improvements, etc). The corporate names and merchandise names written on this catalog are the trademark or registered trademark of the respective corporations. ●Inkjet printers print using extremely fine dots, so colors may vary slightly after replacement of the printing heads. Also note that if using multiple printer units, colors could vary slightly from one unit to other unit due to slight individual differences. ●The specifications described in this catalog are as of September 2024.

Mimaki MIMAKI ENGINEERING CO., LTD.
2182-3 Shigeno-Otsu, Tomi-city, Nagano 389-0512, Japan
TEL:+81-268-64-2281

Mimaki Global Network

USA	MIMAKI USA, INC.	Europe	MIMAKI EUROPE B.V.
Brazil	MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA	Indonesia	PT. MIMAKI INDONESIA
India	MIMAKI INDIA PRIVATE LIMITED	Australia	MIMAKI AUSTRALIA PTY. LTD.
Taiwan	MIMAKI ENGINEERING (TAIWAN) CO.,LTD.	China	SHANGHAI MIMAKI TRADING CO.,LTD.
Singapore	MIMAKI SINGAPORE PTE. LTD.	Thailand	MIMAKI (THAILAND) CO.,LTD.
Vietnam	MIMAKI VIETNAM CO., LTD.		



Commercial and Event Venue, Store, Office
Total Space Design

3.2m Super-Wide Hybrid Textile Inkjet Printer


TS330-3200 DS

Textile Print Decorates the Total Spaces

One Unit - Extend Your Soft Sign Business

Printed soft signages that decorate commercial facilities and event venues have made significant progress in digitization over the past decade.

For further growth of the soft signage business, we offer the "next step" with our Super-Wide Textile Printer, which can also produce interior fabrics.

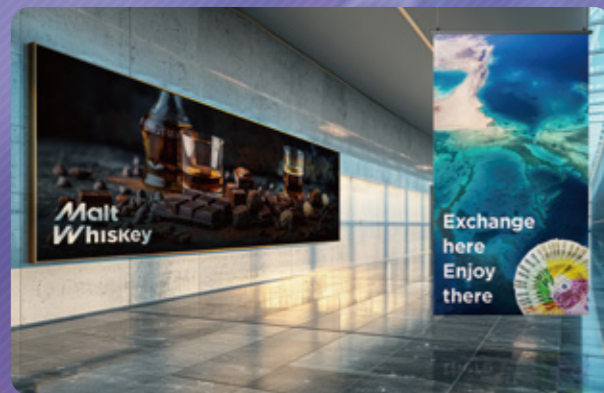

Soft Signage Banners



Beddings & Curtains

Direct Sublimation Printing and Transfer Sublimation Printing in One Unit

A single unit - Specialized media transportation for both fabric and transfer paper



Ink-Receiving Spacer (for fabric)

During direct printing on fabric, the spacers collect ink through the fabric and prevent media contamination.



Removable Platen by Operator



Platen with Adsorption Function (for transfer paper)

During printing on transfer paper, paper wrinkling is minimized to ensure stable printing.



Media Pass - Fabric




Media Pass - Transfer Paper

Stable fabric transport by tension rollers

Equipped with a post heater to accelerate ink drying



Front Rear

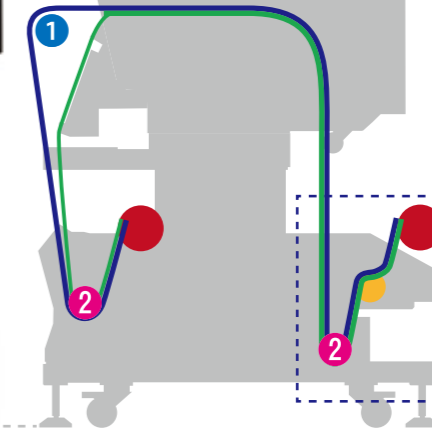

Media Pass Diagram

■ Fabric ■ Transfer Paper

1 Tension Roller


During printing on fabrics, this system prevents sagging of the fabric at the print area and realizes high image quality through stable transport.

2 Tension Bars

Enables stable transport of long outputs.



High Resolution & Definition Print - Equipped "330 Engine"

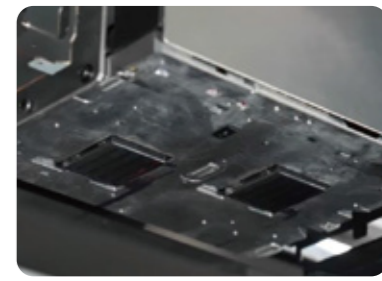

Mimaki's flagship model's print engine delivers high density prints, provides practical image quality with more than twice the productivity of conventional model.

Max. Speed

300 × 600 1P Bi Hi **150 m²/h**

540 × 720 4P Bi Hi 62 m²/h

Production Mode

600 × 600 2P Bi Hi **90 m²/h**

540 × 1080 6P Bi Hi 44 m²/h

High Quality Mode

600 × 1200 4P Bi Hi **55 m²/h**

720 × 1080 12P Bi Hi 20 m²/h

■ TS330-3200DS ■ Conventional Model


Mimaki's Print Technology

Mimaki's proprietary imaging technology, Waveform Control, MAPS4, Variable Dot for high density and beautiful skin tones expression

Superior ink ejection technology for high image quality

Mimaki's unique and advanced ink drop ejection control enables ink drops to be ejected close to a perfect circle and precisely land on the media. The improved accuracy of drop placement enables sharp reproduction of edges, characters, and ruled lines.


■ Without Waveform Control ■ With Waveform Control

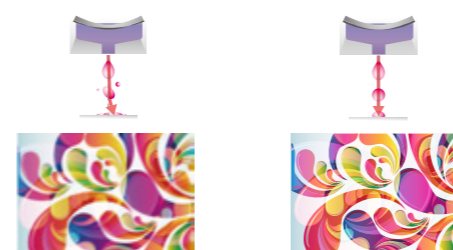

MAPS4 to reduce banding

Prints path borders in a gradient tone to reduce banding and unevenness of colors. It automatically selects the optimal pattern according to printing conditions.

MAPS Function Image

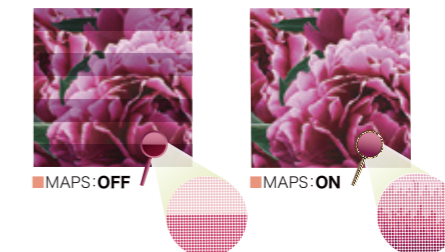

※ MAPS4: Mimaki Advanced Pass System 4

Minimum ink drop size of 4pl Variable Dot

Three types of dots of different sizes are used to produce high quality prints with rich gradation. The fine-grained expression with reduced graininess is possible.

